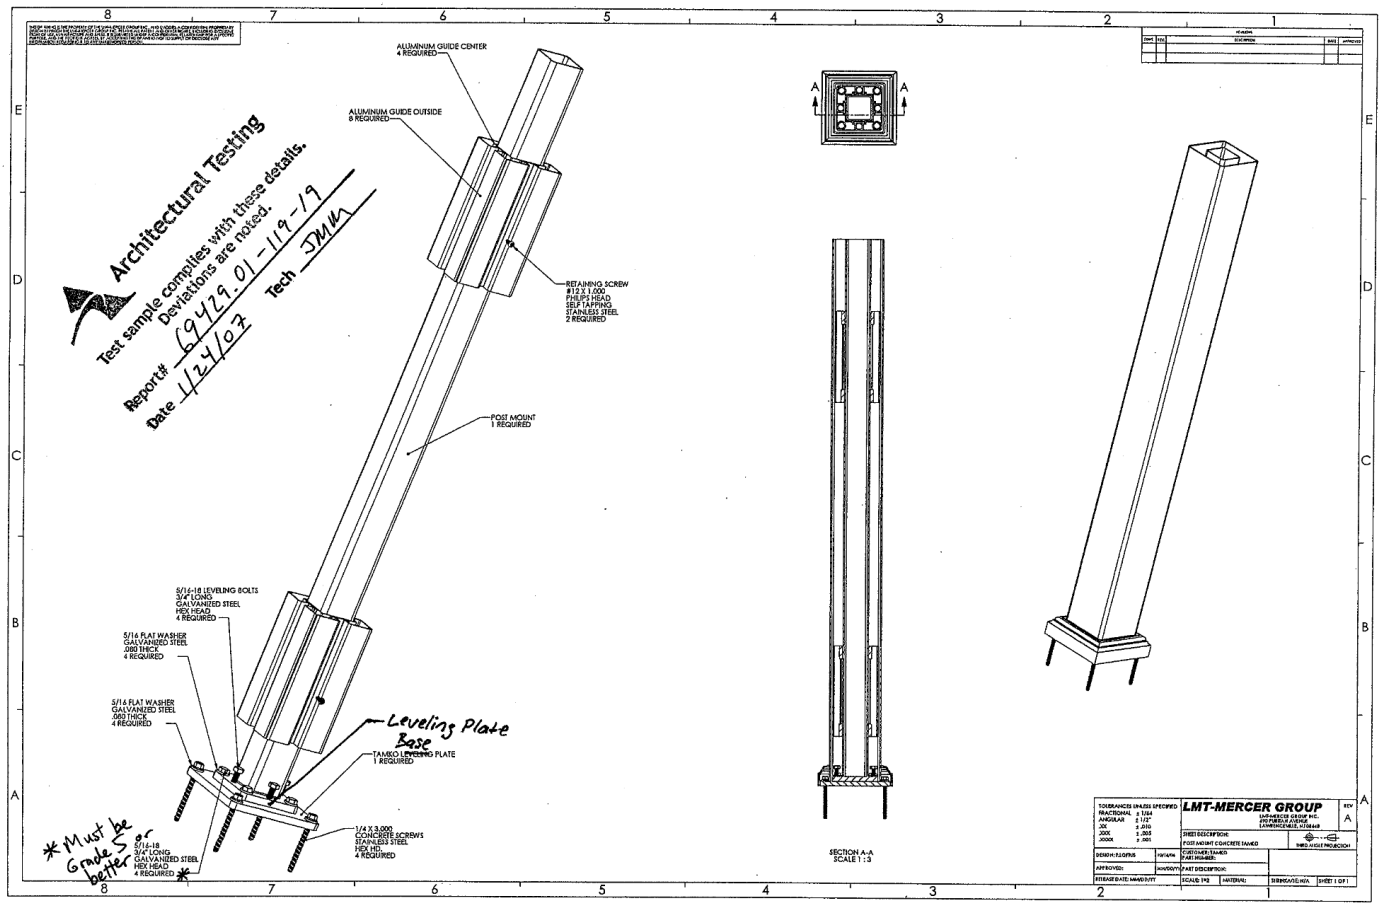

Architectural Testing
Test sample complies with these details.
Deviations are noted.
Report# 69429.01-119-19
Date 1/24/07
Tech JMM
ALUMINUM GUIDE CENTER
4 REQUIRED
ALUMINUM GUIDE OUTSIDE
8 REQUIRED
RETAINING SCREW
#12 X 1.000
PHILIPS HEAD
SELF TAPPING
STAINLESS STEEL
2 REQUIRED
POST MOUNT
1 REQUIRED
5/16-18 LEVELING BOLTS
3/4" LONG
GALVANIZED STEEL
HEX HEAD
4 REQUIRED
5/16 FLAT WASHER
GALVANIZED STEEL
.080 THICK
4 REQUIRED
5/16 FLAT WASHER
GALVANIZED STEEL
.080 THICK
4 REQUIRED
Leveling Plate
Base
TAMKO LEVELING PLATE
1 REQUIRED
1/4 X 3.000
CONCRETE SCREWS
STAINLESS STEEL
HEX HD.
4 REQUIRED
5/16-18
3/4" LONG
GALVANIZED STEEL
HEX HEAD
4 REQUIRED
* Must be Grade 5 or better *
A
A
SECTION A-A
SCALE 1 : 3
LMT-MERCER GROUP
REV
A