

# Gate Installation


and Hinge Placement Instructions



608 Queen Street  
P.O. Box 1137  
Grifton, NC 28530

## Gate Hinge Location

For proper installation of Carolina Vinyl Products gates, it is important to place the hinges in alignment with the top and bottom rails. Failure to do so may result in the gate sagging and becoming out of square. NOTE: hinge edge of gate has an aluminum insert for added strength. Edge with metal is marked "Hinge Side".

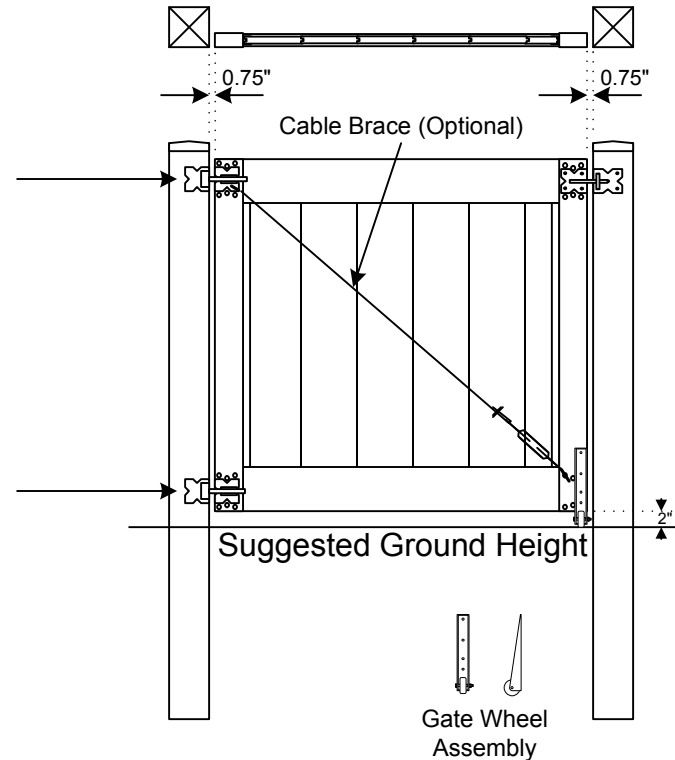

## Cable Brace Installation

On larger gates (over 5') certain gate styles require a cable brace. This brace is packaged loose in the gate package. **A drill is required for this installation.** Drill a 1/4" hole through the gate, using a top hinge hole for location. Install eye bolt. Drill out 1 rivet in bottom rail location and install eye bolt. Cable is factory installed on one eye bolt. Install cable on turnbuckle and attach to other eye bolt. **NOTE:** Cable MUST attach near top hinge to bottom latch side

## NOTE:

A gate wheel assembly can be installed to help carry the load of the gate, thus relieving the load on the gate post. This works with or without the cable brace. Tip: Some rivets may need to be removed.

## Albemarle Gate Shown